

THE VERY LAST STEP TO A SAFE RETURN TO THE GROUND.

EMERGENCY PARACHUTES *ATL*

Emergency parachutes ATL are **built to protect** pilots of sport aircraft, light aircraft, and gliders when it matters most. **Simple to use. Reliable when needed.**

EASE OF USE

QUICK & RELIABLE
CANOPY DEPLOYMENT

VERSATILITY

ADJUSTABLE FOR ALL
BODY SIZES

CUSTOMIZATION

MATCH YOUR STYLE WITH
CUSTOM COLORS

ACTIVATION

RIPCORD CABLE
OR STATIC LINE

CERTIFICATION

ETSO C23D,
SAE AS 8015B

BACKPACK DESIGN

LIGHTWEIGHT AND SLIM
FOR BETTER COMFORT



MATCH
YOUR STYLE



SWEATPADS
FOR COMFORT





VL-037-2



LINE_LENGTH

2,8 M

3,7 M

4,6 M

5,4 M

ATL 15 
BACK

WEIGHT _____
5,6 - 6,2 KG 12,3 - 13,7 LB

ATL 15 SL 
BACK & STATIC LINE

WEIGHT _____
5,8 - 6,4 KG 12,8 - 14,1 LB

ATL 88/90-1
BACK

WEIGHT _____
5,9 - 6,9 KG 12,9 - 15,2 LB

ATL-88/98-S-1
SEAT

WEIGHT _____
8,1 KG 18 LB

OPTIONS

FOR HARNESS HARDWARE



QUICK FIT ADAPTER
H 335




LONG SNAP HOOK
H 405 + 323



QUICK EJECTOR
H 395 + 323

GET YOURS
FROM CERTIFIED DEALER

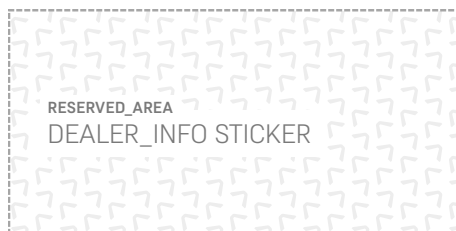

TECHNICAL PARAMETERS	ATL-15 (SL)	ATL-88/90-1	ATL-88/98-S-1
CANOPY SURFACE	36 m ² 387 sqft		
VERTICAL DESCENT RATE [122 KG 269 LB]	7,1 m/s 23,3 ft/s	—	—
VERTICAL DESCENT RATE [77 KG 170 LB]	—	5,5 m/s 16,4 ft/s	5,5 m/s 16,4 ft/s
MAX TOTAL LOAD	122 kg 268 lb	115 kg 254 lb	115 kg 254 lb
MAX DEPLOYMENT SPEED	150 kt EAS		
MIN OPENING ALTITUDE	100 m 328 ft AGL at minimum airspeed		
SERVICE LIFE	20 years		
MAX REPACK CYCLE	365 days		
DIMENSIONS [L x W x T]	53 x 33 x 8 cm	56 x 36 x 9 cm	40 x 35 x 12 cm
CONTAINER DIMENSIONS [L x W x T]	53 x 33 x 8 cm	56 x 36 x 9 cm	40,5 x 34,5 x 12 cm